

757 AGA BALL VALVE


- ❖ FULL PORT ❖ FORGED BRASS ❖ TEFLON SEATS
- ❖ BLOW OUT PROOF STEM ❖ TWO-PIECE BODY ❖ CHROME PLATED BALL
- 600 PSI NON-SHOCK WOG 150 PSI SATURATED STEAM**
- Applications: Commercial and Light Industrial For Water, Oil, Steam

Tested and Certified to the American and Canadian Gas Association Standard
 Conforms to specifications of MSS-SP-110
 Threaded Ends Comply with ANSI B2.1
 UL/FM Approved ISO-9002



DIMENSIONS & WEIGHTS

SIZE (inch)	DN	S	H	L	WT. (lb.)
1/4"	.39	1.81	1.26	3.15	.32
3/8"	.39	1.81	1.26	3.15	.30
1/2"	.59	2.36	1.65	3.54	.56
3/4"	.79	2.68	1.77	3.54	.79
1"	.98	3.15	2.13	4.92	1.34
1-1/4"	1.22	3.54	2.32	4.92	2.02
1-1/2"	1.54	3.90	2.76	5.51	3.17
2"	1.93	4.45	3.07	5.51	3.98

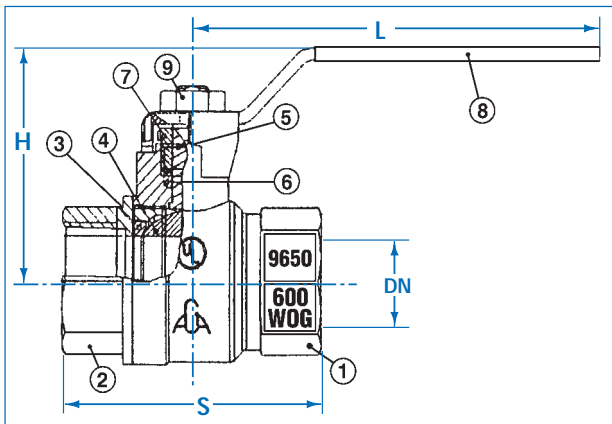

MATERIAL SPECIFICATIONS

NO.	PART	MATERIAL	ASTM SPEC
1	Body	Forged Brass	B124C37700
2	End Plug	Forged Brass	B124C37700
3	Seat	Teflon	PTFE
4	Ball	Chrome Plated Forged Brass	B124CR37700
5	Stem	Forged Brass	B124CR37700
6	Stem Packing	Teflon	PTFE
7	Packing Nut	Forged Brass	B124C37700
8	Handle	Steel	Commercial
9	Nut	Steel	Commercial

