




Firefly™ BG

Bronze Butterfly Valves, UL Listed / FM Approved
 Firefly™ BG Grooved End Sizes : 2" and 2-1/2"

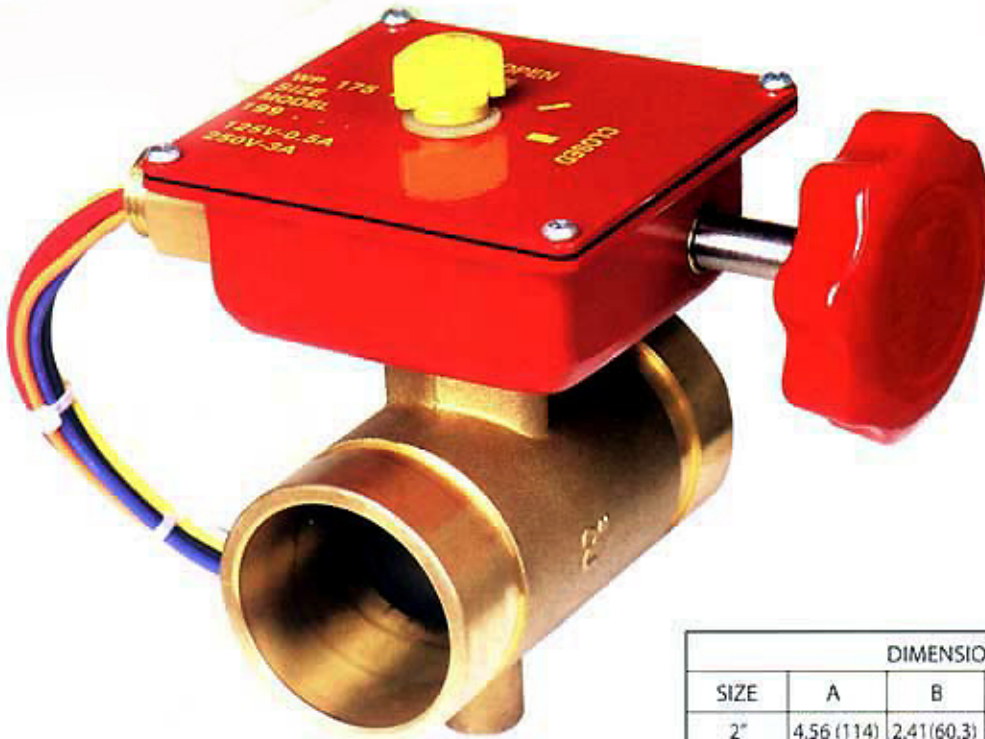

SPECIFICATIONS

Working Pressure : 175 PSI (12.5 Bars)
 Max. Test Pressure : 350 PSI (25.0 Bars)
 Max. Working Temp. : 250 °F (120 °C)

Factory Installed UL Listed Double Tamper Switch For Indoor and Outdoor Use.

MATERIALS OF PRIMARY COMPONENTS

- Body : ASTM B-505
- Disc : ASTM B-584 EPDM Encapsulated
- Upper Stem : ASTM A-564 Type XM 12
- Lower Stem : ASTM A-564 Type XM 12
- Gear Housing, Cover : ASTM A-619
- Hand Wheel : ASTM A-619
- Flag Indicator : ASTM B-16
- York Mechanism : ASTM A-283
- Stem Bushing : ASTM B-16
- Conduit Connector : ASTM A-307
- O-Rings (All) : EPDM Grade "E"
- Cover Gasket : NBR

SIZE	DIMENSION						
	UNIT: IN (mm)						
	A	B	C	D	E	F	G
2"	4.56 (114)	2.41 (60.3)	2.29 (57.15)	0.64 (16)	0.32 (8)	1.96 (49)	3.62 (90.5)
2 1/2"	4.56 (114)	3.0 (75)	2.75 (69.1)	0.64 (16)	0.32 (8)	2.18 (54.5)	3.82 (95.5)

