

**DATA SHEET
#SPS202**

**MODEL H
STANDARD RESPONSE
UPRIGHT & PENDENT - LPCB
SIN: AS5606/AS5605**

Model

- "Automatic" Standard Response Upright & Pendent Glass Bulb Sprinklers, LPCB, Model H - 15mm (1/2" Orifice x 1/2" NPT) - Upright or Pendent Use

K Factor

- 5.6 (8.1)

Sprinkler Identification Number (SIN)

- Upright AS5606 & AS5605

Approvals

- LPCB Approved

To Specify

- Furnish and install "Automatic" Sprinkler Brand Model H Standard Response Glass Bulb Sprinkler. Style, NPT, orifice, K-Factor, finish, and temperature rating as required.

Temperature Ratings



- 135°F (57°C)
- 155°F (68°C)
- 175°F (79°C)
- 200°F (93°C)
- 286°F (141°C)
- 360°F (182°C)
- Open (No Rating)

Finishes

- Plain Brass
- Chrome Plated (Bright)
- Coro-Coated (Wax)
- Coro-Coated over Lead

Note:

See back of page for available style, temperature rating and finish combinations.

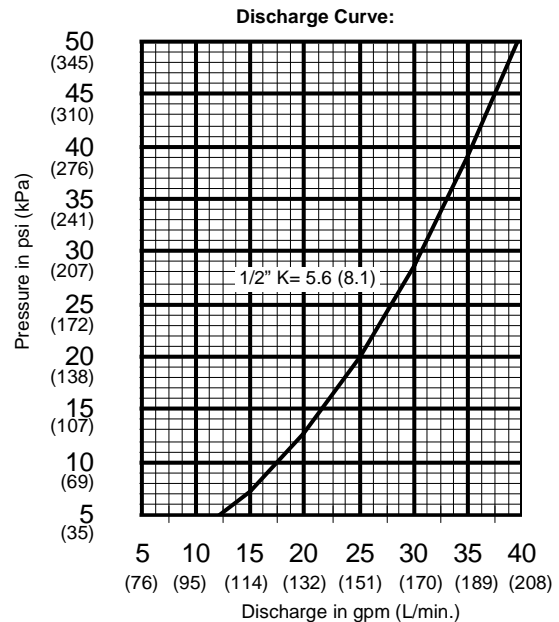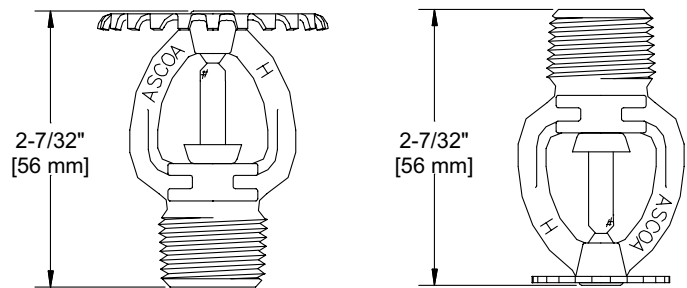

QUICK RESPONSE SUBMITTAL SHEET

Ordering Information

- “Automatic” Model H - 1/2” Orifice x 1/2” NPT - 15mm Upright & Pendent

Type	Temperature Rating	Maximum Ambient Temperature	K Factor	Finish	Upright		Pendent	
					Stock Code No.	Submittal (Check One)	Stock Code No.	Submittal (Check One)
Model H	135°F (57°C) (Orange Bulb)	100°F (38°C)	5.6 (8.1)	Brass	8488010		8489010	
				Chrome	8488011		8489011	
Model H	155°F (68°C) (Red Bulb)	100°F (38°C)	5.6 (8.1)	Brass	8488020		8489020	
				Chrome	8488021		8489021	
				Coro-Coated (Wax)	8488022		8489022	
				Coro-Coated over Lead	8488026		8489026	
Model H	175°F (79°C) (Yellow Bulb)	150°F (66°C)	5.6 (8.1)	Brass	8488030		8489030	
				Chrome	8488031		8489031	
				Coro-Coated (Wax)	8488032		8489032	
				Coro-Coated over Lead	8488036		8489036	
Model H	200°F (93°C) (Green Bulb)	150°F (66°C)	5.6 (8.1)	Brass	8488040		8489040	
				Chrome	8488041		8489041	
				Coro-Coated (Wax)	8488042		8489042	
				Coro-Coated over Lead	8488046		8489046	
Model H	286°F (141°C) (Blue Bulb)	225°F (107°C)	5.6 (8.1)	Brass	8488050		8489050	
				Chrome	8488051		8489051	
Model H	360°F (182°C) (Purple Bulb)	300°F (149°C)	5.6 (8.1)	Brass	8488060		8489060	
				Chrome	8488061		8489061	
Model H	Open		5.6 (8.1)	Brass	8488000		8489000	
				Chrome	8488001		8489001	

This information is only a general guideline. The company reserves the right to change any portion of this information without notice. Terms and conditions of sale apply and are available on request.

07/01 Printed in USA SPS202.QXD

“Automatic” Sprinkler Fire Protection Equipment

Distributors: NNI INC. Tel: 877-NNI-FIRE, 305-756-1102, Fax: 305-757-1902